
CLK-1160
JAW CRUSHER

JAW CRUSHER TECHNICAL SPECIFICATIONS






FEATURES	DATAS
Crusher	Jaw Crusher
Feed Opening	1000 mm x 600 mm
Maximum Feed Size	600 mm
Adjustment Type	Hydraulic
Drive	Electric via V-Belts
Discharge Range (CSS)	40-140 mm
Motor Power	90 kW
Transport Dimensions:	2730 mm (Length) 1082 mm (Width) 2678 mm (Height)
Weight:	14750 kg

Note: All weights and dimensions apply to standard units only.


PRODUCTION CAPACITY:

100-250 T/H


1. Heavy-duty shaft and bearings are equipped with an automatic lubrication system as standard.
2. Level sensor CFS (optional) to optimize the feeding rate of the crusher.
3. Heavy-duty torque arm and inclined-axis motor provide a robust drive and easy belt adjustment.

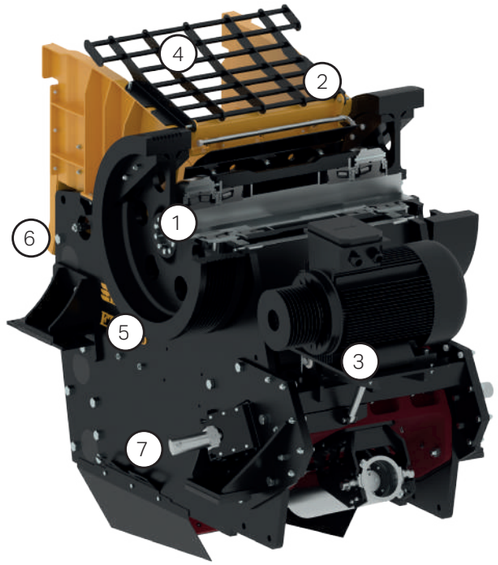


4. Jaw guard designed to withstand heavy impacts caused by material ejected from the jaw.
5. Mn corrugated jaw plates
6. Wall liners added to reduce blockages in the crusher chamber and provide rigidity and durability to the crusher feed hopper.
7. Bolted main frame for maximum strength and durability

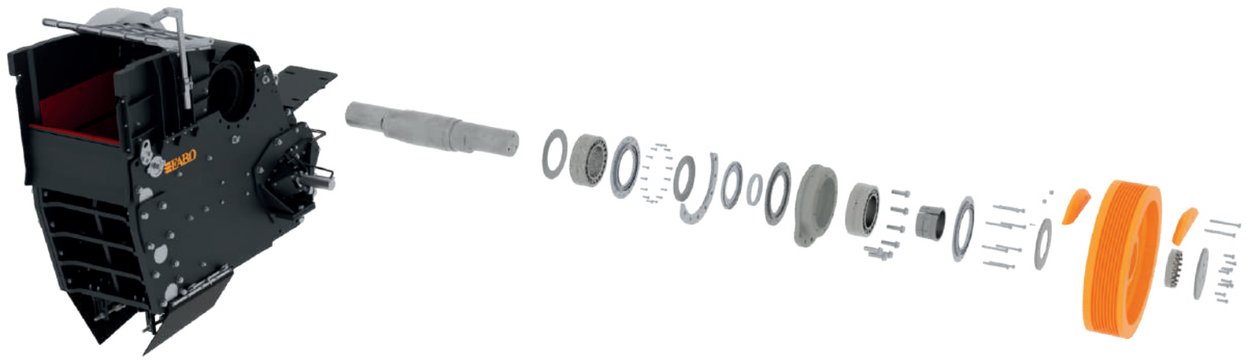


The flywheel is made of GGG60 ductile cast iron, while the eccentric shaft is made of 4140 forged steel alloyed with Cr-Ni-Mo.

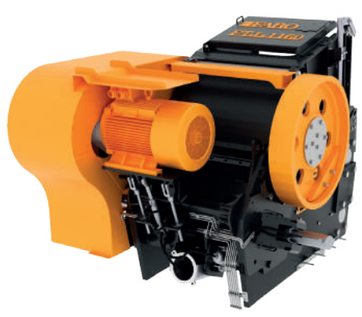

The motor mount is equipped with a hydraulic piston for easy belt replacement.



Crusher Level Sensor

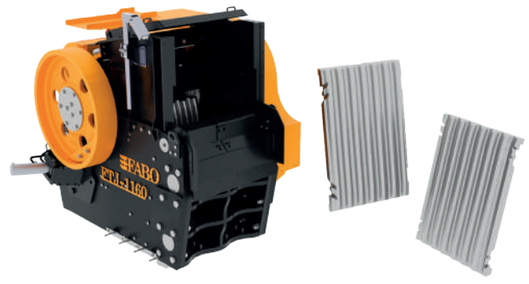

16–18% Mn Alloy Castings

© FABO GLOBAL. All rights reserved. (Tüm hakları saklıdır.)