DSHC-1640
DEWATERING SCREEN

DEWATERING SCREEN TECHNICAL SPECIFICATIONS





SPECIFICATIONS	DATA
1600×4000 Dewatering Screen	
Springs	18 × 106 × 8.5 × 250 (12 pcs)
Polyurethane	250–500 microns
Motor Power	2x8.4 + 75 kW
Transport Dimensions:	6300 mm (Length) 5400 mm (Width) 6400 mm (Height)
Weight:	13000 kg

Note: All weights and dimensions apply only to standard units.


Production Capacity:

150 t/h 0–5 mm sand (output moisture: 8-18%)

1. 400×2 Hydrocyclone
2. Pump
   – 75 kW Pump
   – 10x8
3. Vibratory Motor
   – 2x8,4 kW



4. Front Trough
   – 6 mm ST-37 A1 grade
5. Walkways
   Internal Side Guards
6. Bottom Tank
   – 8 mm ST-37 A1 grade

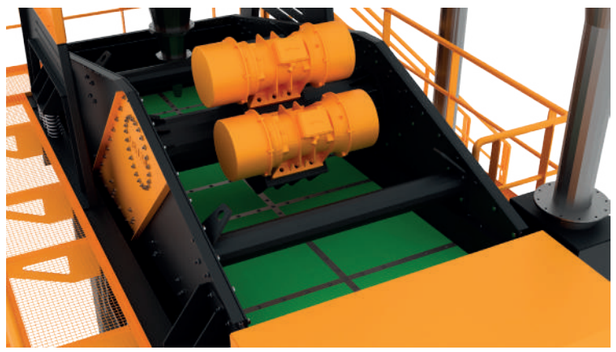

250–500 micron polyurethane



55 kW – 10×8 Slurry Pump



Walkways and ladders for easy maintenance

© FABO GLOBAL. All rights reserved. (Tüm hakları saklıdır.)