TE-1440
VIBRATING SCREEN

TECHNICAL SPECIFICATIONS





FEATURES	DATA
Dimensions	1400 mm x 4000 mm
Final Product Sizes	Products can be obtained in 2, 3, or 4 different sizes.
Number of Screen Decks	3
Motor power	11 kW
Speed	1000 d/d
Screen Aagle	18°
Bearing Housing	18°
Weight	7000 kg

Note: All weights and dimensions apply to standard units only

PRODUCTION CAPACITY:

70-100 TPH

1 FEED OPENING

- It is the section where the material from the crusher first enters the screen.
- Its surfaces are covered with bolted, wear-resistant, replaceable lining plates.
- It ensures uniform distribution of the material across the screen surface.
- It is the point exposed to the highest impact loads.

2 SCREEN BODY

- It is the main body that generates the vibrating motion.
- It features a reinforced construction designed to withstand fatigue cracks.
- It classifies material according to particle size.
- Each deck can be equipped with steel, anti-clogging, or polyurethane screen media with different aperture sizes.
- Its high open area provides maximum screening efficiency.
- It is designed for quick and easy screen media replacement.
- Dimensions: 1400x4000 mm
- Final product sizes: Products can be obtained in 2, 3, or 4 different sizes.
- Motor Power: 11 kW, 1000 rpm
- Available with 3 decks.

3 DRIVE SYSTEM

- Generates vibration through a twin-shaft eccentric shaft and counterweight system.
- Provides a long service life with high-quality bearings.
- Offers flexibility for processing different materials through adjustable stroke (amplitude).
- Features an oil-bath bearing lubrication system.


4 FRONT CHUTE

- Collects the material classified at the corresponding screen deck and directs it in a controlled manner from the discharge point.
- Regulates material flow, preventing spillage and material build-up.
- The inner surfaces are lined with bolted, wear-resistant, replaceable lining plates.
- The wheeled rail system enables quick and easy maintenance and lining plate replacement.

5 PANT-LEG CHUTE

- Ensures the safe and orderly transfer of material passing through the lower screen deck to the designated discharge chute.
- Its inner surfaces are protected with bolted wear plates, providing high wear resistance and a long service life.

FABO®
CRUSHING SCREENING & CONCRETE BATCHING PLANTS

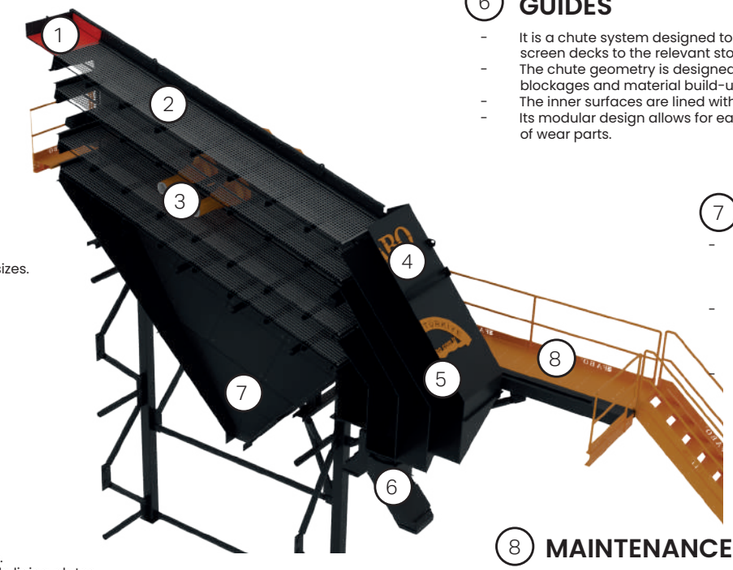

6 GUIDES

- It is a chute system designed to direct products separated at different screen decks to the relevant stockpiling or transfer conveyors.
- The chute geometry is designed to optimize material flow, minimizing blockages and material build-up.
- The inner surfaces are lined with bolted, wear-resistant, replaceable lining plates.
- Its modular design allows for easy maintenance, cleaning, and replacement of wear parts.

7 LOWER CHUTE

- Collects the fine material passing through the bottom deck of the screen and directs it in a controlled manner to the stockpiling conveyor or the next conveying equipment.
- It features an inclination and cross-sectional geometry designed to ensure smooth material flow while minimizing blockages and material build-up.
- The inner surfaces are lined with bolted, replaceable wear-resistant lining plates in areas exposed to high wear.


8 MAINTENANCE PLATFORM AND LADDER

- Provides safe access for the operator to the drive system and screen media.
- Facilitates periodic maintenance operations.
- Complies with TS EN ISO 14122 standards.





Provides high capacity, precise classification, and low maintenance costs through optimized vibration motion and a large screening area.

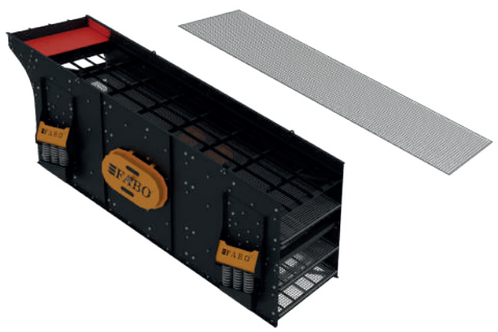

Long-lasting, high-efficiency screen media offering high wear resistance and precise screening performance.



With its four-deck screen design, it classifies different product sizes with high precision in a single operation. Its robust construction and high vibration performance provide maximum capacity and efficient production.



Its high-strength body construction ensures a long service life and resistance to vibration-induced fatigue under continuous operating conditions.

The information in this document is for informational purposes only and is subject to change without prior notice. FABO Global assumes no responsibility for any errors or omissions in this document or for the use of the information provided herein. Due to our ongoing product development process, we reserve the right to change technical specifications without prior notice. The product performance data provided in this brochure is for guidance only; it does not constitute any explicit or implicit warranty or commitment, but merely demonstrates test examples. Results may vary depending on the application. Photographs are for promotional purposes only; some or all of the machines shown may be equipped with optional accessories. For detailed information regarding optional accessories, please contact us.

© FABO GLOBAL. All rights reserved. (Tüm hakları saklıdır.)