VSI-1000 OR
VERTICAL SHAFT IMPACT CRUSHER

TECHNICAL SPECIFICATIONS



FEATURES	DATAS
Crusher	Vertical Shaft Impact Crusher
Rotor Dimensions	Ø 1000 mm
Maximum Feed Size	100 mm
Drive	Electric via V-Belts
Speed	50-70 m/s
Transport Dimensions:	5735 mm (Length) 3250 mm (Width) 3130 mm (Height)
Weight:	19000 kg

Note: All weights and dimensions apply to standard units only.

PRODUCTION CAPACITY:

150-400 T/H

1 **Crusher Feed Hopper**
- Maximum Feed Size: 100 mm
- Wear Liners: Included
- Liner Type: Bolted

2 **Crusher Rotor and Pendulum System**
- Rotor Type: Open Rotor
- Rotor Diameter: 1000 mm
- Pendulum System: Replaceable

3 *Automatic Lubrication System**
- Control Panel: Timer-Controlled
- Capacity: 6 Liters
- Country of Origin: Italy

4 **Rotor Inspection Cover**
- An inspection cover is provided for checking the inside of the crusher.

5 **Hydraulic Control Unit**
- Movement Type: Hydraulic Oil
- Pressure Gauge: Included
- Motor Power: 3 kW


6 **Motor**
- Motor Power: 2 × 200–250 kW / 50 Hz
- Speed: 1500 RPM
- Brand: GAMAK

7 **Chassis**
- UPN: 300
- Platform: Included
- Dimensions: 5500 × 2185 × 2595 mm

* OPTIONAL





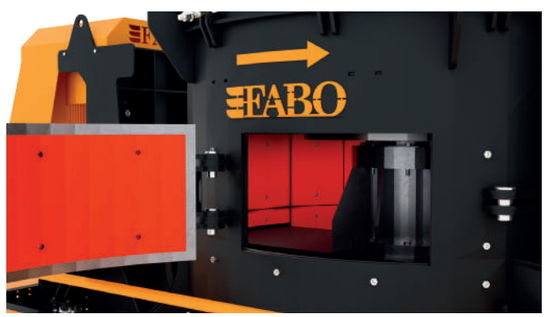

An inspection cover is provided for checking the inside of the crusher.



Easy access to the crushing chamber with a bolted system.



Wear-resistant crusher diamond tips

© FABO GLOBAL. All rights reserved. (Tüm hakları saklıdır.)