
CLK-130
JAW CRUSHER

JAW CRUSHER TECHNICAL SPECIFICATIONS






FEATURES	DATA
Crusher	Jaw Crusher
Feed Opening	1300 mm x 1100 mm
Max. Feed Size	1000 mm
Adjustment Type	Hydraulic
Drive	Electric Motor via V-Belts
Discharge Setting (CSS)	120-280 mm
Motor Power	200 kW
Transport Dimensions	4364 mm (Length) 2820 mm (Width) 3525 mm (Height)
Weight:	51000 kg

Note: All weights and dimensions apply to standard units only.

PRODUCTION CAPACITY:
300-600 T/H

ADDITIONAL TECHNICAL SPECIFICATIONS


- **Motor**
  - Motor Power: 200 kW
  - Brand: EMTAŞ
  - Speed: 1,500 rpm
- **Bearings**
  - Brands: SKF, FAG, NACHI
- **Swing Jaw Plate**
  - Width: 1,230 mm
  - Length: 2,374 mm
  - Material: Cast Steel
- **Fixed Jaw Plate**
  - Width: 1,310 mm
  - Length: 2,206 mm
  - Material: Cast Steel
- **Body Liner**
  - Thickness: 40 mm
  - Type: Bolted
  - Material: Cast Steel
- **Eccentric Shaft**
  - Dimension: 2,700 mm
  - Material Type: 4140 Forged Steel

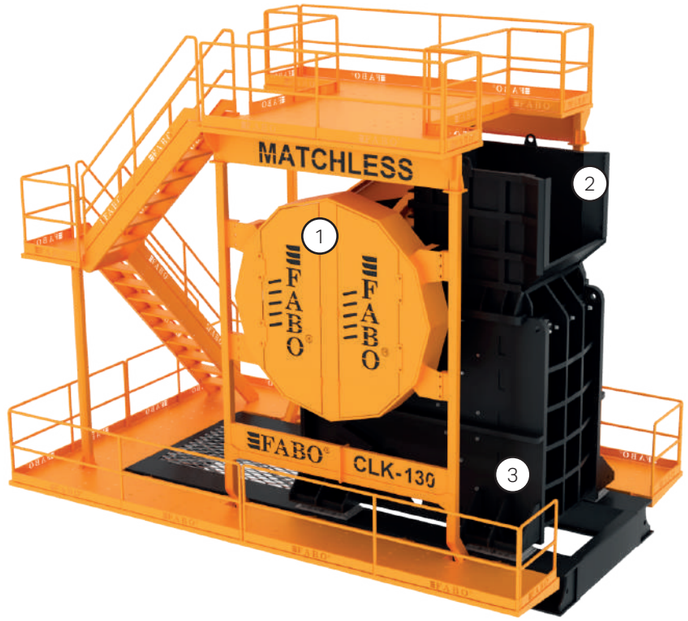


1. **Flywheel**
   - Dimensions: Ø 1,800 × 400 mm
   - Material: Ductile Cast Iron
   - Provides additional energy to the system during sudden power demands, ensuring continuous and efficient crushing operation.

2. **Feed Hopper**
   - Maximum Feed Size: 1,000 mm
   - Ensures controlled material feeding into the crusher.

3. **Crusher Body**
   - Body Thickness: 80 mm
   - Including Protective Liners

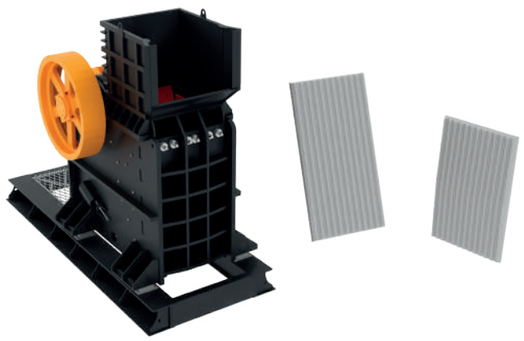

16–18% Mn Alloy Cast

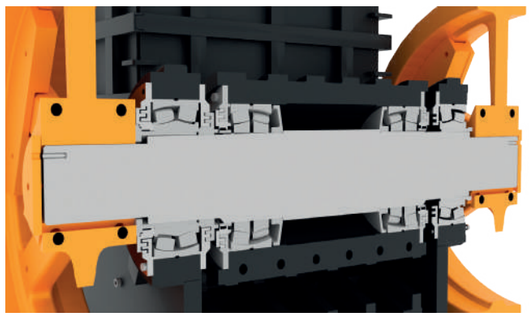

Cr-Ni-Mo Alloy 4140 Forged Steel



Walkways and Stairs for Easy Maintenance

© FABO GLOBAL. All rights reserved. (Tüm hakları saklıdır.)